



● HPZ1005 TYPE

型号	阻抗 ( $\Omega$ )	阻抗偏差	阻抗测试频率 (MHz)	直流电阻 Max ( $\Omega$ )	额定电流 Max (mA)
HPZ1005D121-R60	120	$\pm 25\%$	100	0.25	600
HPZ1005D221-R50	220	$\pm 25\%$	100	0.38	500
HPZ1005U121-R60	120	$\pm 25\%$	100	0.25	600
HPZ1005U121-1R1	120	$\pm 25\%$	100	0.13	1100
HPZ1005U221-R50	220	$\pm 25\%$	100	0.38	500
HPZ1005U221-R70	220	$\pm 25\%$	100	0.25	700






● HPZ1608 TYPE

型号	阻抗 ( $\Omega$ )	阻抗偏差	阻抗测试频率 (MHz)	直流电阻 Max ( $\Omega$ )	额定电流 Max (mA)
HPZ1608G121-R90	120	$\pm 25\%$	100	0.13	900
HPZ1608D121-1R5	120	$\pm 25\%$	100	0.07	1500
HPZ1608D151-R80	150	$\pm 25\%$	100	0.20	800
HPZ1608D151-1R5	150	$\pm 25\%$	100	0.07	1500
HPZ1608D221-R60	220	$\pm 25\%$	100	0.25	600
HPZ1608D221-1R2	220	$\pm 25\%$	100	0.12	1200
HPZ1608D331-R90	330	$\pm 25\%$	100	0.15	900
HPZ1608D391-R70	390	$\pm 25\%$	100	0.18	700
HPZ1608D471-R70	470	$\pm 25\%$	100	0.22	700
HPZ1608D601-R70	600	$\pm 25\%$	100	0.24	700
HPZ1608D102-R60	1000	$\pm 25\%$	100	0.35	600
HPZ1608E601-R80	600	$\pm 25\%$	100	0.25	800
HPZ1608E102-R60	1000	$\pm 25\%$	100	0.35	600
HPZ1608E152-R50	1500	$\pm 25\%$	100	0.50	500
HPZ1608U101-R80	100	$\pm 25\%$	100	0.20	800
HPZ1608U101-2R0	100	$\pm 25\%$	100	0.055	2000
HPZ1608U121-2R0	120	$\pm 25\%$	100	0.055	2000
HPZ1608U221-R60	220	$\pm 25\%$	100	0.25	600
HPZ1608U471-R50	470	$\pm 25\%$	100	0.32	500
HPZ1608U601-R50	600	$\pm 25\%$	100	0.35	500
HPZ1608U102-R15	1000	$\pm 25\%$	100	0.90	150










★ 电气特性

TYPICAL ELECTRICAL CHARACTERISTICS

● HPZ1005 Series

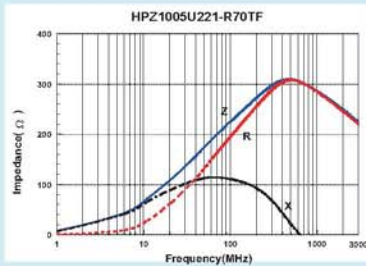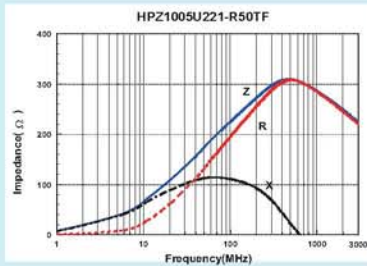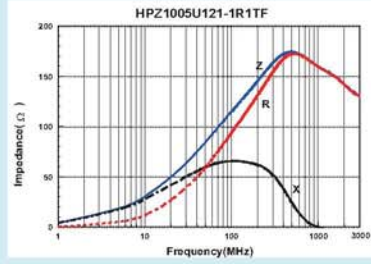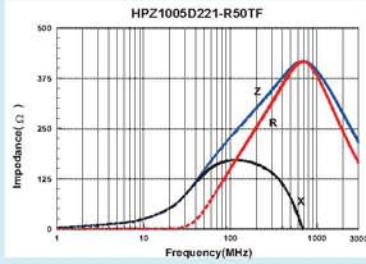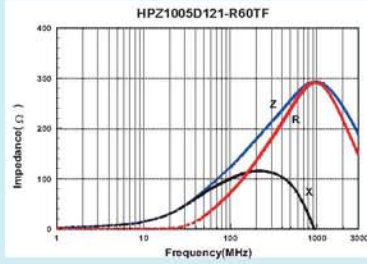

● HPZ1608 Series

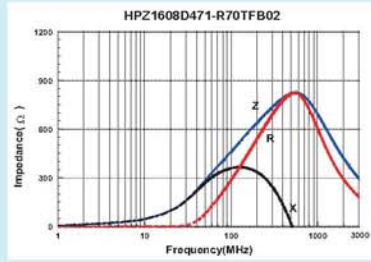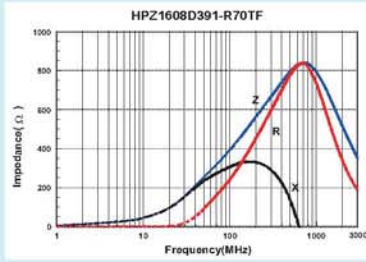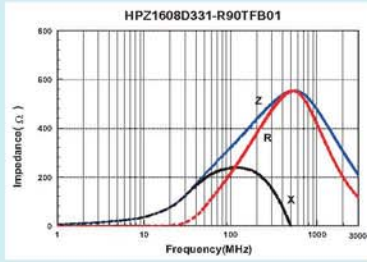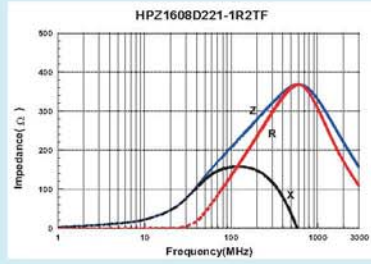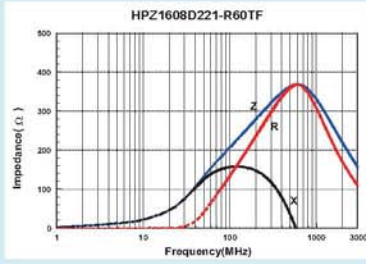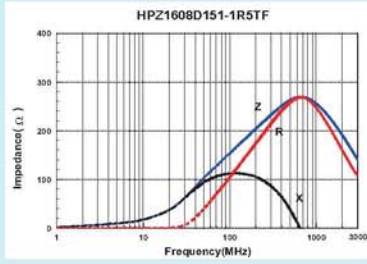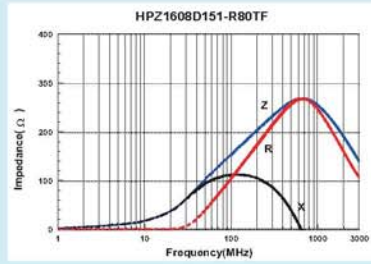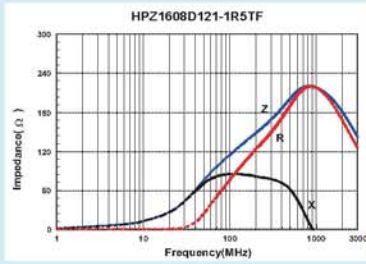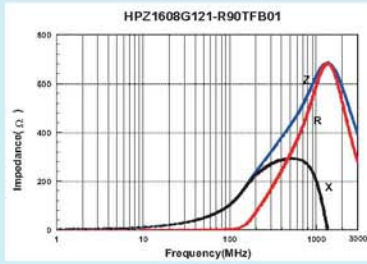

● HPZ1608 Series

